




**ENGINEERED FLEXIBLE PRODUCTS, INC.**

5331 Quam Ave., N.E.  
St. Michael, MN 55376

## Seismic "V" Loops - Threaded Loops

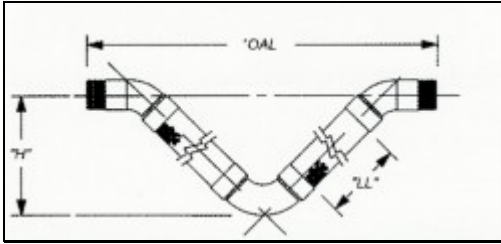

Size (in.)	Overall Length OAL (in.)	Live Length LL (in.)	H (in.)	Approx. Spring Force * (Lbs.)	Pressure Ratings (PSIG)		Allowable Motions X, Y or Z
					W.P.	Max. Test	
1/2	22-1/4	9	9-1/4	35	1335	2003	2"
3/4	23-3/4	10	9-3/4	41	1135	1703	
1	27-1/2	11	10-3/4	45	795	1193	
1-1/4	29-3/4	12	12	64	610	915	
1-1/2	31-1/2	12-1/2	12-1/2	68	530	795	
2	37-1/2	14	14-1/2	82	516	774	
2-1/2	40-3/4	14-1/2	15-1/2	86	395	593	
3	45-1/2	16-1/2	17-3/4	93	385	578	
4	51-1/2	18	20	127	270	405	
1/2	25-3/4	11-1/2	11	75	1335	2003	3"
3/4	27-1/4	12-1/2	11-1/2	82	1135	1703	
1	31	13-1/2	12-3/4	86	795	1193	
1-1/4	33-1/2	14-1/2	13-3/4	93	610	915	
1-1/2	35-3/4	15-1/2	14-3/4	127	530	795	
2	42	17	16-1/2	214	516	774	
2-1/2	45-1/2	18	18	228	395	593	
3	50-1/2	20	20-1/4	312	385	578	
4	57	22	23	345	270	405	
1/2	28-1/2	13-1/2	12-1/4	75	530	795	4"
3/4	30-3/4	15	13-1/4	82	516	1703	
1	34-1/2	16	14-1/2	86	795	1193	
1-1/4	37	17	15-1/2	93	610	915	
1-1/2	39-1/4	18	16-1/2	127	530	795	
2	46	20	18-1/2	214	516	774	
2-1/2	49	20-1/2	22-3/4	228	395	593	
3	55-1/4	23-1/2	25-1/2	312	385	578	
4	62	25-1/2	25-1/2	345	270	405	